


Staff Gauges



Overview

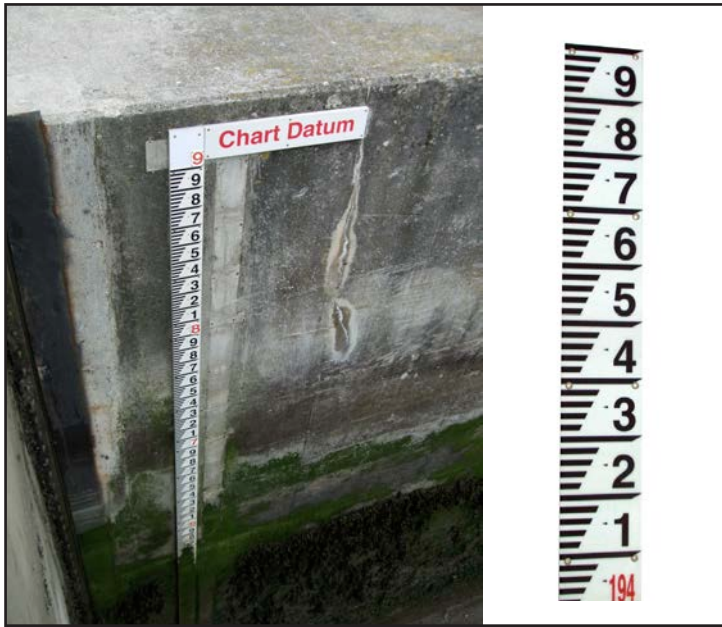

Geosense® Staff Gauges are used mainly to measure the water levels in dam reservoirs or in combination with V-notch weirs to monitor seepage or entry flows as part of Dam Safety Monitoring programs.

Made from 150mm wide x 4mm thick lightweight glass reinforced plastic (GRP) they offer higher durability and longer life than products made from cast iron or other metals.

They are provided with red datum numerals for easy surveying and the numerals can either be on separate boards or printed directly onto the board itself.

Fixings are made by eight M10 stainless steel screws into the pre-drilled holes on the board.

Special ranges or sizes can be produced to meet specific project requirements

APPLICATIONS

Measuring water levels in or on:

- Dams
- Rivers & streams
- Lagoons
- Harbours
- V-Notch weirs

FEATURES

- Made from GRP
- Corrosion resistant
- Low moisture absorption
- High impact resistance
- Chemically resistant
- Long life
- Lightweight
- Clear markings
- In accordance with BS 3680 Part 7
- Red datum numerals

ORDERING INFORMATION

- Top & bottom elevation reference
- Datum numerals separate plates
- Datum numerals printed on board



Geosense Ltd, Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England
www.geosense.co.uk e sales@geosense.co.uk t +44(0)1359 270457